


CP2

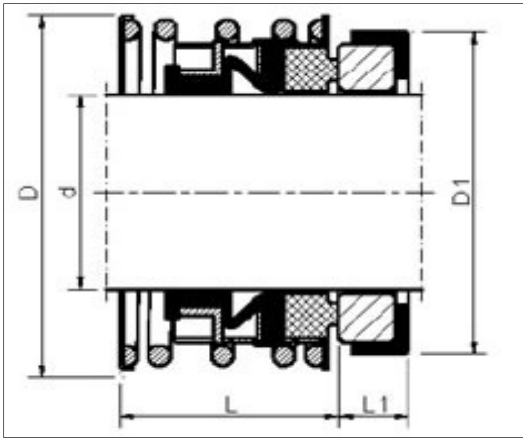

Shaft Size (in)	Shaft Size (mm)	Seal O.D.	Operating Length	Operating Length	Seat Thick
<i>d</i>	<i>d</i>	<i>D</i>	<i>L1</i>	<i>L2</i>	<i>L3</i>
0.500	12	1.187	0.813	1.000	0.312
0.625	14-16	1.312	0.875	1.000	0.406
0.750	18	1.437	0.875	1.000	0.406
0.875	20-22	1.562	0.937	1.000	0.406
1.000	24-25	1.791	1.000	1.000	0.437
1.125	28	1.910	1.062	1.299	0.437
1.250	30-32	2.061	1.062	1.299	0.437
1.375	33-35	2.250	1.125	1.299	0.437
1.500	38	2.375	1.125	1.299	0.437
1.625	40	2.718	1.375	1.299	0.500
1.750	43-45	2.750	1.375	1.614	0.500
1.875	48	2.875	1.500	1.614	0.500
2.000	50	3.000	1.500	1.614	0.500
2.125	53	3.250	1.687	1.614	0.562
2.250	55	3.375	1.687	1.614	0.562
2.375	60	3.500	1.812	1.614	0.562
2.500	63	3.625	1.812	1.614	0.562
2.625	65	3.875	1.937	1.929	0.625
2.750	70	4.000	1.937	2.047	0.625
2.875	73	4.125	2.062	2.047	0.625
3.000	75	4.250	2.062	2.205	0.625
3.125	80	4.562	2.187	2.205	0.625
3.250		4.687	2.187	2.205	0.625
3.375	85	4.812	2.187	2.205	0.625
3.500		4.937	2.187	2.205	0.625
3.625	90	5.125	2.312	2.323	0.687
3.750	95	5.250	2.312	2.323	0.687
3.875		5.437	2.312	2.441	0.687
4.000	100	5.562	2.312	2.441	0.687
4.500	110	5.315	2.312		
4.750	120	5.709	2.835		

Technical Features

Single Seal
 Bi-directional
 Unbalanced
 Elastomer diaphragm
 Single Spring
 Equivalent to John Crane type 2,
 Pac-seal type 52, US Seal type D

Materials

Seal Faces: carbon graphite, silicon carbide, tungsten carbide

Stationary seats: ceramic, silicon carbide, tungsten carbide

Elastomers: Neoprene, NBR, FPM, EPDM

Metal components: AISI 304, 316, 316Ti